

Folha de dados do produto

Especificações



Cabeçote para sinalizador modular Ø22mm plástico, para lâmpada BA9s, verde

ZB5AV03

Principal

Linha de produto	Harmony XB5
Tipo de produto ou componente	Cabeçote para sinalizador
Compatibilidade do produto	BA 9s
Nome abreviado do dispositivo	ZB5
Material do aro	Plástico cinza escuro
diâmetro de montagem	22 mm
Tipo de cabeçote	Normal (22mm)
quantidade indivisível de venda	1
formato do cabeçote da unidade de sinalização	Redondo
Cor da pastilha ou da lente	Verde
informações adicionais do acionamento	Com lente lisa

Complementar

largura total CAD	29 mm
altura total CAD	29 mm
profundidade total CAD	31 mm
Peso líquido	0,018 kg
Nome da posição	XALD 1...5 furos XALK 2...5 furos
código de composição elétrica	P3 em Montagem frontal com BA 9s P4 em Montagem frontal com BA 9s e transformador PF2 em Montagem frontal com BA 9s
Apresentação do dispositivo	Componentes separados

Meio ambiente

Tratamento de proteção	TH
Temperatura ambiente para armazenamento	-40...70 °C
Temperatura ambiente para funcionamento	-40...70 °C
categoria de sobretensão	Classe II conforming to IEC 60536
grau de proteção IP	IP66 conforme IEC 60529 IP67 conforme IEC 60529 IP69 conforme IEC 60529 IP69K conforme ISO 20653
Enclosure Type	UL type 4X/13

Isenção de responsabilidade Esta documentação não tem como objetivo substituir nem deveser utilizada para determinar a adequação ou confiabilidade desses produtos para aplicações específicas

resistência a lavagem sobre alta pressão	7000000 Pa a 55 °C , distância : 0,1 m
Grau de proteção IK	IK05 conforming to IEC 50102
Normas	IEC 60947-5-4 JIS C8201-5-1 IEC 60947-1 CSA C22.2 No 14 IEC 60947-5-1 IEC 60947-5-5 UL 508 JIS C8201-1
resistência à vibração	5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6
resistência ao choque	30 gn (duração = 18 ms) para Aceleração de meia onda senoidal conforme IEC 60068-2-27 50 gn (duração = 11 ms) para Aceleração de meia onda senoidal conforme IEC 60068-2-27

Unidades de embalagem

Unit Type of Package 1	PCE
numero de unidades por emb.	1
Package 1 Height	4,500 cm
Package 1 Width	3,400 cm
Package 1 Length	5,400 cm
peso da embalagem (Lbs)	16,000 g
Unit Type of Package 2	S03
Number of Units in Package 2	300
Package 2 Height	30,000 cm
Package 2 Width	30,000 cm
Package 2 Length	40,000 cm
Package 2 Weight	5,194 kg
Unit Type of Package 3	P06
Number of Units in Package 3	2400
Package 3 Height	75,000 cm
Package 3 Width	60,000 cm
Package 3 Length	80,000 cm
Package 3 Weight	50,604 kg

Garantia contratual

Garantia (em meses)	18
---------------------	----



Environmental Data

A Schneider Electric visa atingir o status Zero Líquido até 2050 por meio de parcerias na cadeia de suprimento, materiais de menor impacto e circularidade por meio da nossa campanha contínua "Use Better, Use Longer, Use Again" para prolongar a vida útil e a capacidade de reciclagem dos produtos.

[Explicação dos Environmental Data](#) >

[Como avaliamos a sustentabilidade do produto](#) >

Pegada ecológica	
Pegada de carbono do ciclo de vida total	0.1 kg CO2 eq.
Pegada de carbono da fase de fabricação [A1–A3]	0.1 kg CO2 eq.
Pegada de carbono da fase de distribuição [A4]	0 kg CO2 eq.
Pegada de carbono da fase de instalação [A5]	0 kg CO2 eq.
Pegada de carbono da fase de utilização [B2, B3, B4, B6]	0 kg CO2 eq.
Pegada de carbono da fase de fim de vida [C1–C4]	0 kg CO2 eq.
Perfil ambiental do produto (PEP)	Perfil ambiental do produto

Use Better


Materiais e embalagem	
Porcentagem média de plástico reciclado	16 %
Pacote com papelão reciclável	Sim
Embalagens sem plástico	Sim
Diretiva RoHS da UE	Em conformidade
Regulamento REACH	A referência não contém SVHC acima do limite

Use Again

Reembalar e refabricar	
Potencial de reciclagem, em %	22
Perfil de circularidade	Informação sobre o fim da vida útil
Recolha de produtos	Não

Dimensions Drawings


Dimensions



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

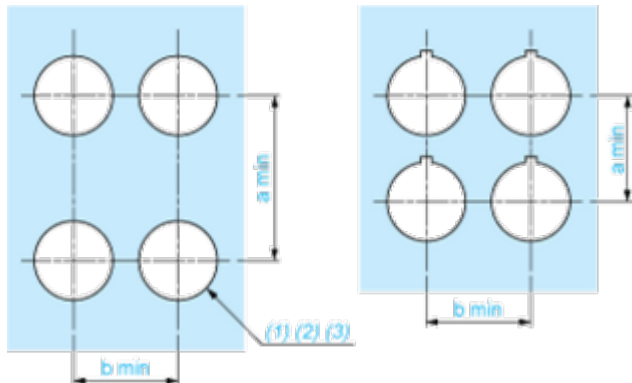

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ($\text{Ø}22.3 \text{ }_0^{+0.4}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in. }_0^{+0.016}$)

Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess

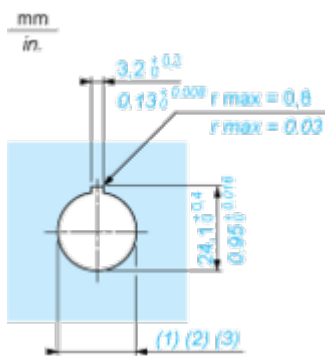

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended ($\text{Ø}22.3 \text{ }_0^{+0.4}$) / Ø0.89 in. recommended ($\text{Ø}0.88 \text{ in. }_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

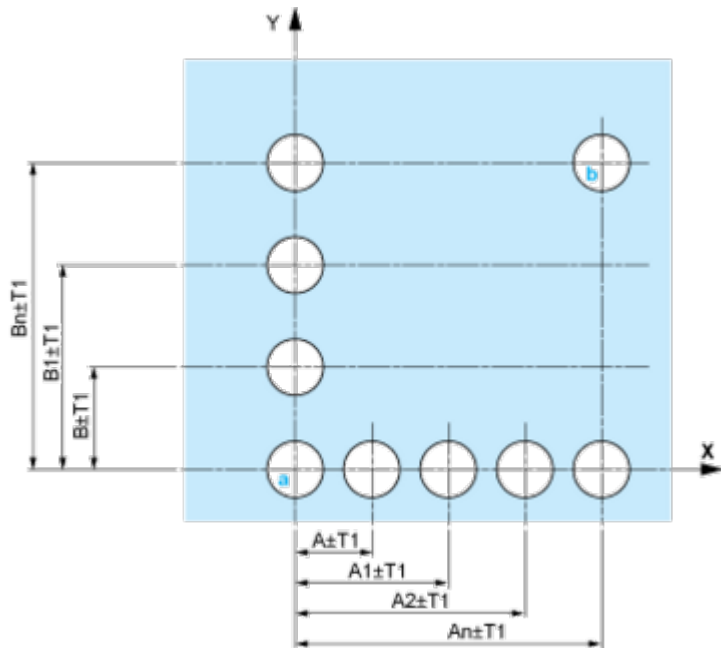


A: 30 mm min. / 1.18 in. min.
B: 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

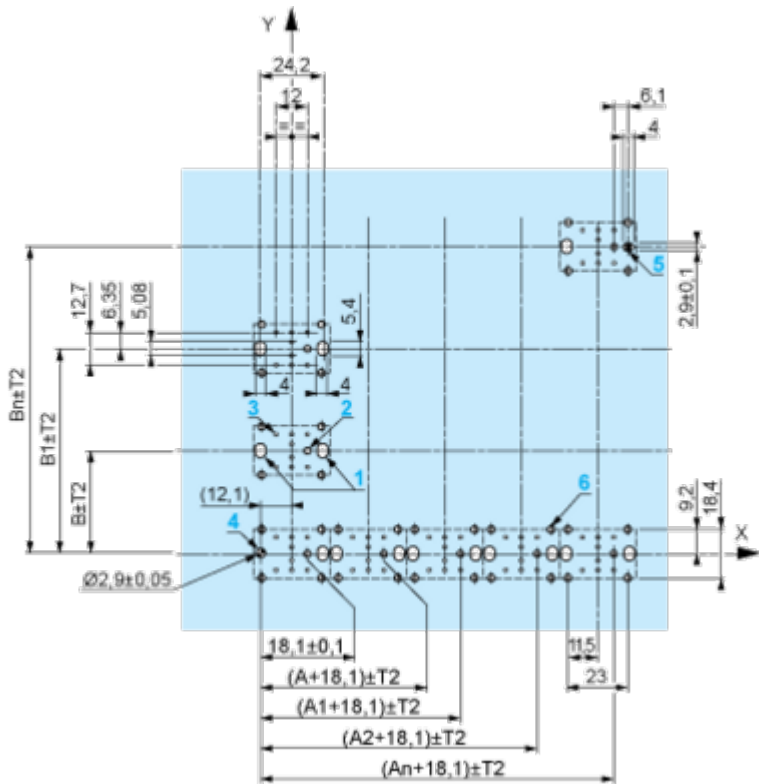

A: 30 mm min.
B: 40 mm min.
Dimensions in in.

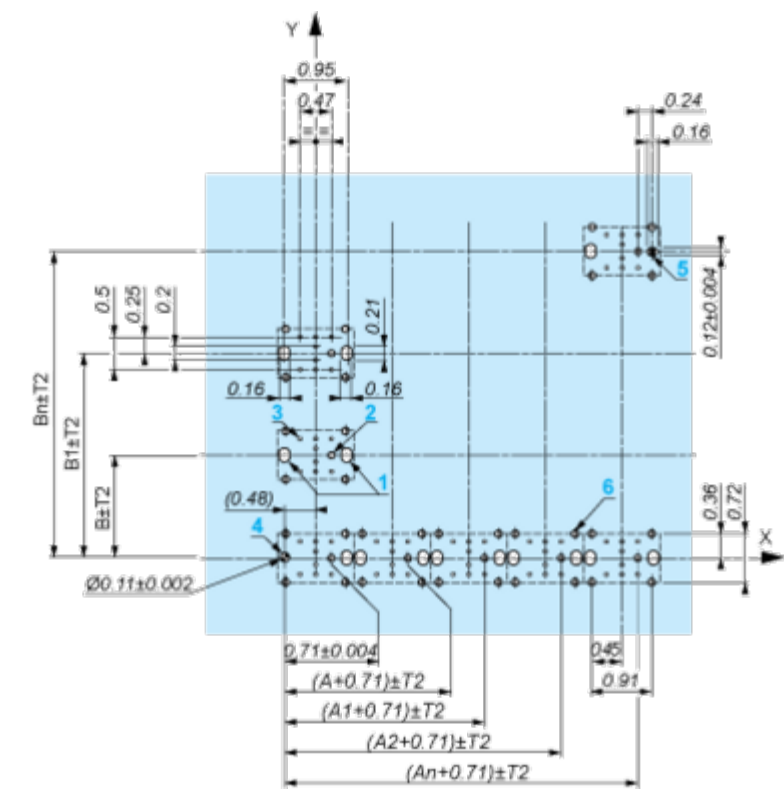

A: 1.18 in. min.
B: 1.57 in. min.


General Tolerances of the Panel and Printed Circuit Board

The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2° 30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - with each selector switch head (ZB5AD*, ZB5AJ*, ZB5AG*).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

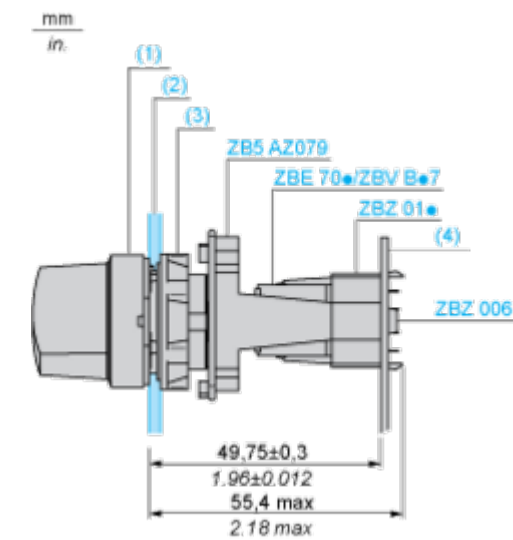

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole $\varnothing$ 2.4 mm $\pm$ 0.05 / 0.09 in. $\pm$ 0.002 for centring adapter ZBZ01•
- 3 8 $\times$ $\varnothing$ 1.2 mm / 0.05 in. holes
- 4 1 hole $\varnothing$ 2.9 mm $\pm$ 0.05 / 0.11 in. $\pm$ 0.002, for aligning the printed circuit board (with cut-out marked **a**)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked **b**)
- 6 4 holes $\varnothing$ 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the $\varnothing$ 2.4 mm $\pm$ 0.05 / 0.09 in. $\pm$ 0.002 holes for centring adapter ZBZ01•.

Technical Description

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block



Electrical Composition Corresponding to Code P4



Legend

Single contact



Double contact



Light block



Possible location



Image of product / Alternate images

Alternative





