
AAccessories

Common Accessories

Contact Blocks and LED Blocks for Ø16 Control Switches

Ordering Information

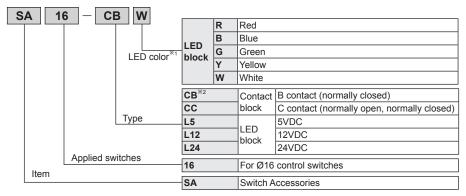

Contact block and LED block removal
 Separate the unit using a flat-head (-) screwdriver.




- X1. Only for LED blocks.
- X2. Only for Ø16 emergency switches.

Item	Appearance	Model	Туре	Features
Contact block	SA15-CB 2507/AC3A Autoals	SA16-CB	B contact (normally closed)	For Ø16 emergency switches
	SA18-CC NE21 SA18-CC 33014CJA 1100A SA Suresist	SA16-CC	C contact (normally open, normally closed)	_
LED block	SA16-L5R 2000 25mh or peaks	SA16-L5□ (5VDC) SA16-L12□ (12VDC) SA16-L24□ (24VDC)	DC voltage type	Diverse, vibrant, high luminance LEDs (red, blue, green, yellow, white)



Contact Blocks and LED Blocks for Ø22/25, Ø30, □30 Control Switches

Ordering Information

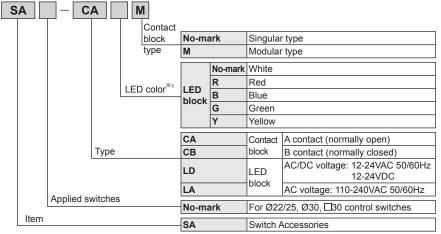

 Contact block and LED block removal Separate the unit using a flat-head (-) screwdriver.



※1. Only for LED blocks.

*Multi-unit connection is only available for modular type (SA-□M).

*Multi-unit connectio	KMulti-unit connection is only available for modular type (SA-□M).				
Item	Appearance	Model	Туре	Features	
Modular type contact block	Autonics SA-CAM	SA-CAM	A contact (normally open)	Ring or spade terminals / Multi-connection (up to 3 units)	
	Autorics SA-CBM , 5 ^{∞2} , • • • • • • • • • • • • • • • • • • •	SA-CBM	B contact (normally closed)		
Singular type contact block	Aletonics BA-CA S	SA-CA	A contact (normally open)	Spade terminals only / Loose screw prevention	
	Putchics 194-00 - Win CE - Win CE - SAN	SA-CB	B contact (normally closed)		
Modular type LED block	Autories BA-LEN	SA-LD⊡M	AC/DC voltage type 12-24VAC 50/60Hz 12-24VDC	Diverse, vibrant, high luminance LEDs (Red, Blue, Green, Yellow, White)	
	Audorics Schalas Sensor CE SENSOR CE SENSOR CE 116 - TOURN, ONA	SA-LA⊡M	AC voltage type 110-220VAC 50/60Hz		
Singular type LED block	Restories: SA-LD Comments of State Comments of S	SA-LD□	AC/DC voltage type 12-24VAC 50/60Hz 12-24VDC		
	Restories SA-LA 110-de-may PMI C C 110-2009/C, 100A	SA-LA□	AC voltage type 110-220VAC 50/60Hz		

Control Switches

Ø16

□30

Ø22/25 Ø30

Push Button Switches

Square

Selector Switches

Square

Key Selector Switches

Round

Rectangular

Double Push Button Switches

Switches

Switches

Pilot Lights


Accessories

Buzzers

(A) Accessories


Switch Enclosures for Ø22/25 Control Switches


Ordering Information

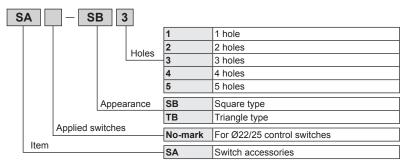



XYou can order the other size and the number of holes.



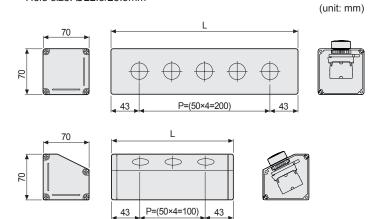

Holes	L
1	86mm
2	136mm
3	186mm
4	236mm
5	286mm

Locking Handle for Switches

Applied switches	Appearance	Model	Note
Ø16	0	SA16-LH	For locking switch nuts behind the
Ø22/25, Ø30 ^{×1} , □30	0	SA-LH	panels

X1. Except Ø30 round pressure switches (extended).



Accessories By Item

Accessories By Item					Ø16
Item	Appearance	Model	Dimensions	Note	Ø22/25
Emergency switch nameplates	PSH STOR	SA-NS	Size: D60×d25	Standard and illuminated nameplates are available for emergency switches. ※Illuminated nameplates are optional. ※D60 emergency switches (S2ER-E5R□) are not compatible with SA-NS nameplates	Ø30 □30
		0,1110			Push Button Switches Round
	WALL STOR	SA-NL	Size: D80×d25		Square Rectangular
					Selector Switches Round
Protective shrouds for emergency switches		SA-EG1		Protective shrouds to prevent accidental/incorrect operation	Square
			4		Key Selector Switches Round
			8 Ø22.6 Ø60		Rectangular
		SA-EG2/ SA-EG3		SA-EG2 Ø22.5	Push Button Switches Mushroom-head Push Button Switches
				switches (S2ER-E5R□).	Emergency Switches
			16 D 49.8 64		Accessories
Waterproof cap for Ø22/25 round push button switches	(extended)	SA-WP (non-illuminated/ extended)	288	IP65 protection structure with waterproof cap	Buzzers
		SA-WL (illuminated/ extended)	17.5		
Ø20/25 Switch washer	\Diamond	SA-SW2	30 22	The washer helps to improve switch	
Ø30 Switch washer	\Diamond	SA-SW3	36 30.2	tightening force.	
Lens remover for Ø16 push button control switches or pilot lights		SA16-RM		Lens remover for push button control switches or pilot lights	

Autonics A-109